


COVID-19 SOLUTIONS

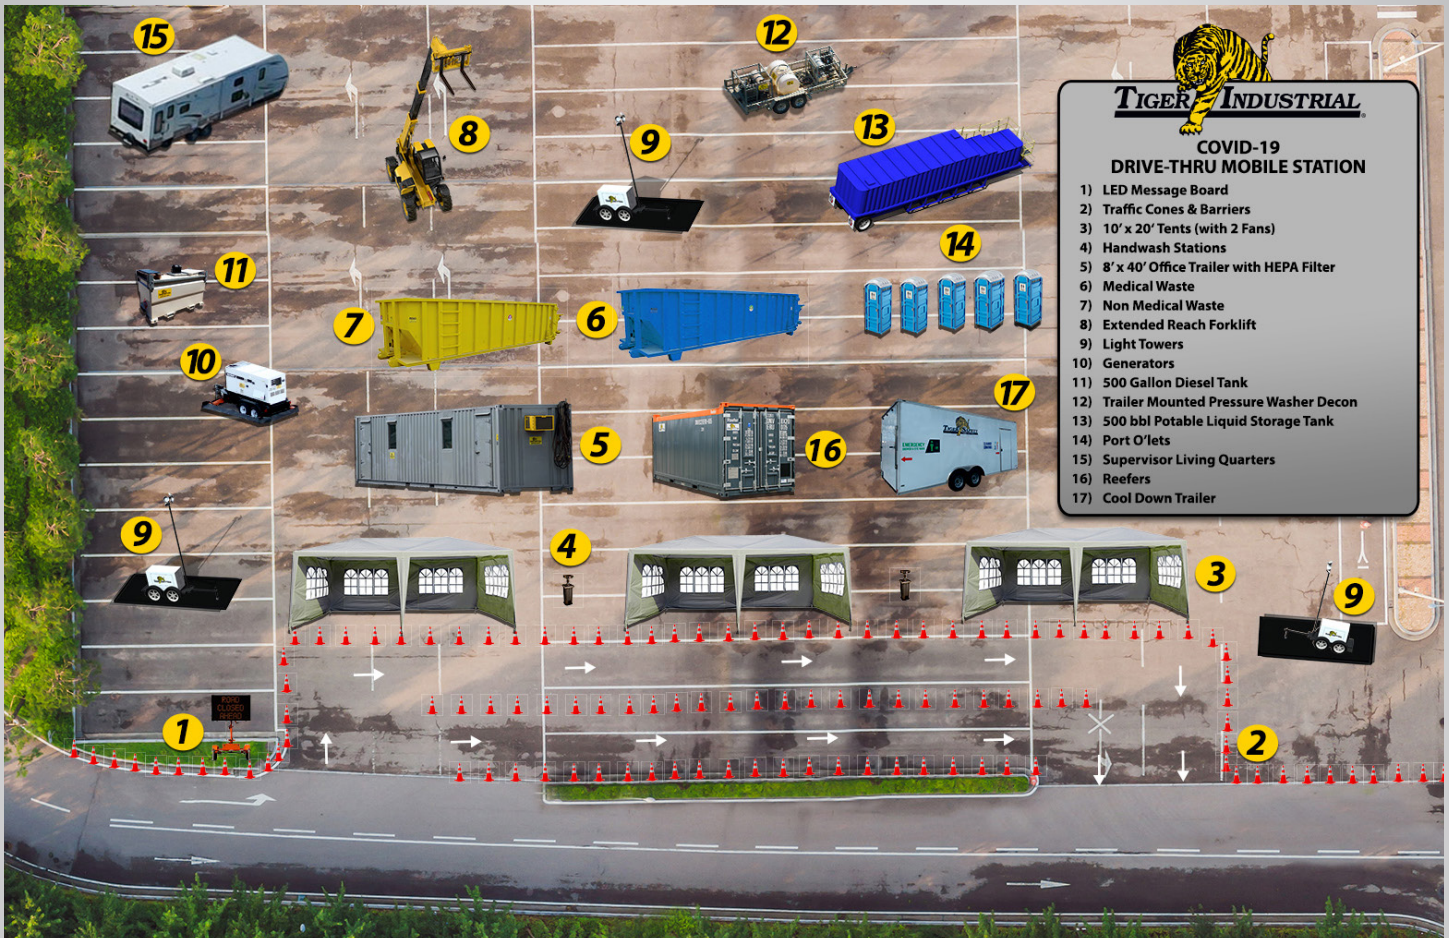

TIGER COVID-19 DRIVE-THRU MOBILE STATIONS READY FOR DELIVERY!

As a result of the Corona virus pandemic, Tiger is offering Emergency Response Services to companies and governments locally, state-wide, nationally and internationally. As a commercial service and rental company, Tiger Rentals has a team of specialized personnel who will support the efforts of our government during the COVID-19 pandemic. Between our core companies, Tiger Safety, Tiger Industrial Rentals and Tiger Offshore Rentals, we can offer both rental equipment and services to combat this epidemic.

- Man Camps
- Large Tents
- Office Trailers
- Refrigeration Units
- Light Towers
- Generators
- Roll-Off Boxes
- Overpack Drums
- Portable Fuel Cells
- Ventilation
- Cool Down Fans
- Cool Down Trailers
- Tables & Chairs
- Barriers
- Signs
- Safety Personnel
- Medical Personnel
- PPE
- Telemedicine

For more details on our complete pandemic packages, visit us at [TigerIndustrialRentals.com](https://www.TigerIndustrialRentals.com) or speak to a representative at +1 (888) 866-0047.





YOUR FIRST RESPONDERS FOR DISASTER RECOVERY

As of March 2020

Turnkey Package Includes:

- 01 Jobsite Supervisor (Safety Professional) to stay on site permanently- 12 hour shift
- Daily Fueling & Maintenance of Assets
- Nightly Decon (Hot Water/ Bleach formula) of Test Area
- Management of Waste Services Including Manifesting
- 12 Radio Communications Package
- 8x40 Office Trailer to Include:
 - Air Conditioning
 - Data Ports
 - Portable Internet System
 - 03 Desks w/ Chairs
 - 03 Additional Chairs
 - 02 Dry Erase Boards
 - 01 Hepa Filter with UV Light
- 25 KVA Generator with Distribution Panel & Cabling
- 500 Gal Double Wall Fuel Tank w/Fuel Pump
- 01 Extended Reach Forklift 6K
- 03 Portable Light Towers
- 01 Electric Reefer Unit
- 01 Trailer Mounted Self Contained Hot Water Decon Pressure Washer
- 03 8x20 Portable Tents
- 04 Large Fans
- 01 Non Medical Trash 20yd Roll Off Waste Container
- 01 20Yd Roll Off Waste Container for Bagged Medical Waste
- 60 Traffic Cones
- 02 LED Traffic MSG Boards Trailer Mounted
- Onsite Portable Living Trailer for on-site Supervisor
- 500 BBL Liquid Storage Tank f/Potable Water Storage
- 04 120Qt Ice Chests
- 04 Port-o-Lets with Daily Service
- 02 Hand Washing Station with 2/Week Service
- 01 Cool Down Trailer



Price Does Not Include:

- Site Set-up or Break-Down
- Transportation (In/Out) of all Assets
- Waste Haul Off & Disposal
- Water, Fuel, Internet, Consumables, PPE, Ice

24/7 Dispatch: +1(888) 866-0047 / +1(409) 832-9336 / TigerRentals.com



125 KVA PORTABLE GENERATOR

► TECHNICAL DATA

L X W X H	12' X 6' X 8'
STANDBY OUTPUT	110 KW
PRIME OUTPUT	100 KW
WEIGHT	6,900 LBS
FUEL CAP	169 GAL
RUN TIME	24 HRS
AMP DRAW	
1PH 120 V	277 AMPS
1PH 240 V	139 AMPS
3PH 240 V	300 AMPS
3PH 480 V	150 AMPS



FUEL CONSUMPTION	
FULL LOAD	7.3 GPH
3/4 LOAD	5.7 GPH
1/2 LOAD	4.0 GPH
OPTIONAL ACCESSORIES	
<ul style="list-style-type: none"> • 12' X 12' Containment Berm • 50' Extension Cord • Auxiliary Fuel Tank • 100 AMP Distribution Box 	





LED PORTABLE LIGHT TOWER

► TECHNICAL DATA

L X W X H	716" X 98" X 348"
WEIGHT	1,720 LBS
FUEL CAP	30 GAL
RUN TIME	50 HRS
LUMENS	542,000
STABILIZER	Four-Point Outrigger System

OPTIONAL ACCESSORIES

- SHO-HD® Lamp Fixture – 4 Metal Halide Lamps Only
- SLS™ Sequenced Light System™
- Gull-Wing Style Doors –Reaction injection molded doors providing strength and corrosion resistance
- Forklift Pockets and Lifting Eye
- 30 Gallon Polyethylene Fuel Tank
- Four-Point Outrigger System
- GPS Ready
- 59° Fixture Rotation
- 55 mph Operating Wind Speed Rating



► TECHNICAL DATA

SIZE	8' X 16'
SQ FT	128 sf
WEIGHT	3,000 lbs
MATS/TRUCK	14/15
CONNECTING	Directly
PSI	3,910
LINEAR FT/TRUCK	112
CONSTRUCTION	HDPE+
THICKNESS	4"

► ADVANTAGES

- Maximum Durability
- Extreme Life
- Very Contractor Friendly
- Fast & Easy to Lay
- Traceable with RFID Chip
- High PSI
- No Nails & No Cable Loops
- No Pinning Required
- Flame Spread Rated
- No Absorption & Won't Float
- Repairable





8' X 40' QUARANTINE BUILDINGS

► TECHNICAL DATA

SIZE	PSI RATING	DURATION	RESPONSE LEVEL
8'x40'	6.3 PSI	800 MS	MEDIUM
8'x40'	8.0 PSI	42.5 MS	MEDIUM
WEIGHT	22000 LBS		
LIFTING LUGS	(4)		
HVAC	18,000 Btu Units, Non-Classified Electrical Insulated		
ELECTRICAL	(1) 240 V, 100 A, Single Phase, Non-Classified Electrical		
DOORS	(2) Blast Rated Doors		
WINDOWS *	(2) Blast Rated Windows		
FIRE PROTECTION	(2) Smoke Detectors & (1) Fire Extinguisher		
LIGHTS	(2) Emergency Exit Lights (6) 4' Long Dual Bulb Fluorescent Lights		
OUTLETS	(6) Duplex Electrical Outlets		
PORTS	(3) Data Ports & (3) Phone Ports		
WALLS	Painted Interior Wall Covering - 3/4" Industrial Grade Plywood		
FLOORS *	Heavy Industrial Rubberized Tile Floors		
PAINT	Exterior Paint - Direct To Metal, Rust Inhibiting, High Solids Urethane (Steel Grit Blast Prep)		
OPTIONAL UPGRADES			
• Tool/Material Racks And Cabinets • Wireless/Radio Signal Amplifier			






8' X 40' DECON UNIT

► TECHNICAL DATA

SIZE	PSI RATING	DURATION	RESPONSE LEVEL
8'x40'	6.3 PSI	800 MS	MEDIUM
8'x40'	8.0 PSI	42.5 MS	MEDIUM
WEIGHT	22000 LBS		
LIFTING LUGS	(4)		
HVAC	18,000 Btu Units, Non-Classified Electrical Insulated		
ELECTRICAL	(1) 240 V, 100 A, Single Phase, Non-Classified Electrical		
DOORS	(2) Blast Rated Doors		
WINDOWS *	(2) Blast Rated Windows		
FIRE PROTECTION	(2) Smoke Detectors & (1) Fire Extinguisher		
LIGHTS	(2) Emergency Exit Lights (6) 4' Long Dual Bulb Fluorescent Lights		
OUTLETS	(6) Duplex Electrical Outlets		
PORTS	(3) Data Ports & (3) Phone Ports		
WALLS	Painted Interior Wall Covering - 3/4" Industrial Grade Plywood		
FLOORS *	Heavy Industrial Rubberized Tile Floors		
PAINT	Exterior Paint - Direct To Metal, Rust Inhibiting, High Solids Urethane (Steel Grit Blast Prep)		
OPTIONAL UPGRADES			
• Tool/Material Racks And Cabinets • Wireless/Radio Signal Amplifier			

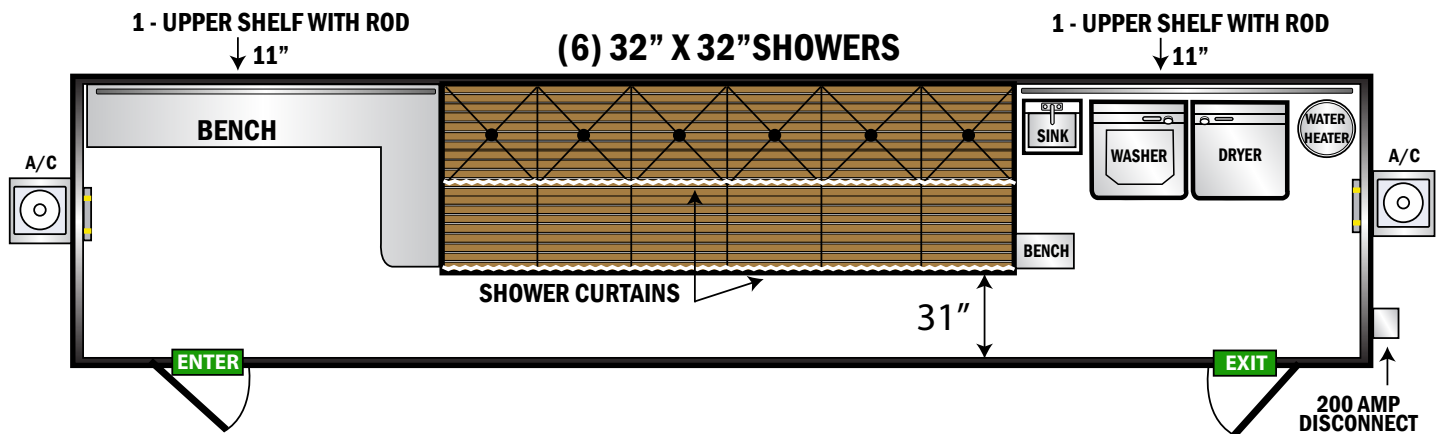



8' X 40' MULTI-BATH UNITS

► TECHNICAL DATA

SIZE	PSI RATING	DURATION	RESPONSE LEVEL
8'x40'	6.3 PSI	800 MS	MEDIUM
8'x40'	8.0 PSI	42.5 MS	MEDIUM
WEIGHT	22000 LBS		
LIFTING LUGS	(4)		
HVAC	18,000 Btu Units, Non-Classified Electrical Insulated		
ELECTRICAL	(1) 240 V, 100 A, Single Phase, Non-Classified Electrical		
DOORS	(2) Blast Rated Doors		
WINDOWS *	(2) Blast Rated Windows		
FIRE PROTECTION	(2) Smoke Detectors & (1) Fire Extinguisher		
LIGHTS	(2) Emergency Exit Lights (6) 4' Long Dual Bulb Fluorescent Lights		
OUTLETS	(6) Duplex Electrical Outlets		
PORTS	(3) Data Ports & (3) Phone Ports		
WALLS	Painted Interior Wall Covering - 3/4" Industrial Grade Plywood		
FLOORS *	Heavy Industrial Rubberized Tile Floors		
PAINT	Exterior Paint - Direct To Metal, Rust Inhibiting, High Solids Urethane (Steel Grit Blast Prep)		
OPTIONAL UPGRADES			
<ul style="list-style-type: none">• Tool/Material Racks And Cabinets• Wireless/Radio Signal Amplifier			





550 GALLON STAINLESS STEEL TOTE TANK

► TECHNICAL DATA

OPT 1 DIMENSIONS	L X W X H	
EXTERNAL (MM)	1422 x 1270 x 1905	
EXTERNAL (FT)	4'8" x 4'2" x 6'3"	
WEIGHT	KGS	LBS
TARE	272	600
PAYLOAD	2431	5360
MAX GROSS WEIGHT (MGW)	2703	5960


OPT 2 DIMENSIONS	L X W X H	
EXTERNAL (MM)	1422 x 1270 x 1905	
EXTERNAL (FT)	4'8" x 4'2" x 6'3"	
WEIGHT	KGS	LBS
TARE	285	628
PAYLOAD	3972	8757
MAX GROSS WEIGHT (MGW)	4257	9385
CAPACITY	LITERS	GALS
VOLUME	2082	550

ADDITIONAL FEATURES

- One 2" Ball Valve Drain with Male Camlock & Cap
- Vented Hatch & Fusible Vent
- Top Mounted Drum Cover
- Forklift-able From Three Sides
- 316L Stainless Steel Construction



► DRAWINGS

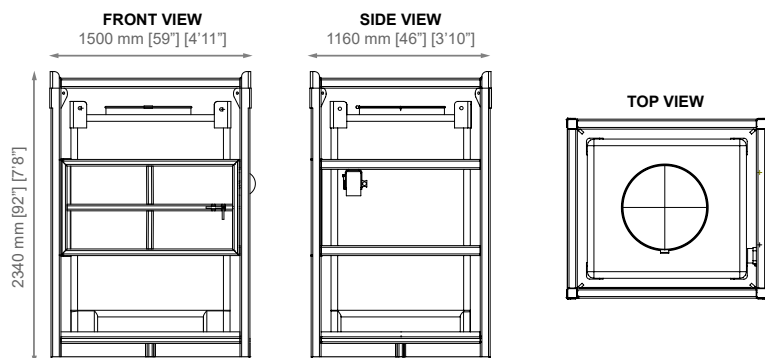



528 GAL DOUBLE WALL FUEL POD

► TECHNICAL DATA

L X W X H	87" X 46" X 52"
CONTAINMENT	110% SECONDARY CONTAINMENT
CAPACITY	1,825 LBS EMPTY/ 5,574 LBS FULL
<ul style="list-style-type: none">• Internal Baffles• Secure Hose Access• Full Load Lifting Eyes• Tie Down Points• Direct to Machinery Fuel Ports	

OPTIONAL ACCESSORIES

- 16' Tandem Trailer
- 110V Fuel Pump
- Fuel Pump - 12V Fuel Pump & Solar Panel





4,000 PSI TRAILER MOUNT HOT WATER PRESSURE WASHER

► TECHNICAL DATA

SKID MOUNT L X W X H	54" X 48" X 50"
TRAILER MOUNT L X W X H	19' X 8' X 6'
WEIGHT	6,500 LBS
FUEL CAPACITY	18 GAL
WATER CAPACITY	325 GAL
RUN TIME	4 HRS
TEMPERATURE	160° FAHRENHEIT
TRAILER BALL	2" OR 2 5/16"
GPM	6 GPM
ENGINE	25 HP KUBOTA DIESEL

OPTIONAL ACCESSORIES

- Turbo Nozzle
- 3/8" X 50' Pressure Hose
- Foot Pedal
- Flex Lance
- Double Trigger Gun
- Extension Wand
- 30" Hydro Mower





4,000 PSI TRAILER MOUNT HOT WATER PRESSURE WASHER 2-SKID (DOUBLE TROUBLE)

► TECHNICAL DATA

SKID MOUNT L X W X H	54" X 48" X 50"
TRAILER MOUNT L X W X H	109" X 88" X 66"
WEIGHT	6,500 LBS
FUEL CAPACITY	18 GAL
WATER CAPACITY	325 GAL
RUN TIME	4 HRS
TEMPERATURE	160° FAHRENHEIT
TRAILER BALL	2" OR 2 5/16"
GPM	6 GPM
ENGINE	25 HP KUBOTA DIESEL

OPTIONAL ACCESSORIES

- Turbo Nozzle
- 3/8" X 50' Pressure Hose
- Foot Pedal
- Flex Lance
- Double Trigger Gun
- Extension Wand
- 30" Hydro Mower







OPEN TOP SOLID WASTE CONTAINER SPECIFICATIONS

► TECHNICAL DATA

FLOOR	F3/16" PL(std), 1/4" PL(optional)
CROSSMEMBERS	3 x 4.1 channel, 18" on center
WALLS	12 GA with 3" x 4" tubing top rail and 12 GA, formed channel verticals 24" on center
DOOR	12 GA with tubing frame
FRONT	12 GA slant formed PICK UP: Standard cable with 2" x 6" x 3/16" rails, gusset at each crossmember
WHEELS	(2) 8" DIAx 9" Lat rear, (2) skids at front
DOOR LATCH	Vertical latch with safety chain
WELDS	Continuous inside, skip weld outside
FINISH	Coated inside and out with direct to metal, rust inhibiting acrylic enamel color coat
DIMENSIONS	22'-11" long (21'-8" inside), 96" wide (84" inside), see drawing for height
OPTIONS	Ampliroll, Heil and Dino pick up also available. Start with a design that has been professionally engineered, add the highest quality steel, and an experienced team of zero-defect fabricators and tough quality control inspectors and you get the best open top container on the market.

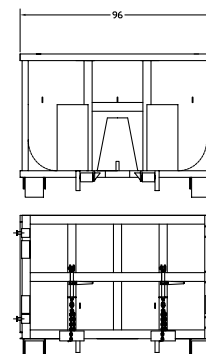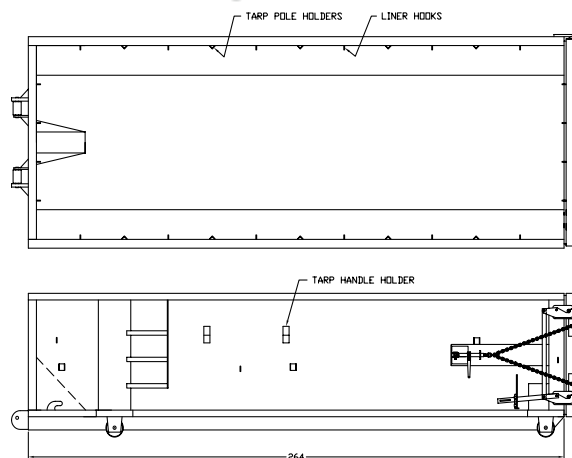



CLIMATE CONTROL TRAILER

► TECHNICAL DATA

DESCRIPTION

- Dimensions 6'x12'
- 30 AMP 3 Prong Male Head Cord that Connects to a Generator
- Benches for Seating
- Portable Fan & Heater
- Power Outlets
- Inside Lighting



► TECHNICAL DATA

DESCRIPTION

- Intrinsically Safe
- Intrinsically Safe Rechargeable Battery
- Intrinsically Safe Lapel Mic
- Estimated Battery Life - 8 Hrs.
- Frequency Band UHF
- 8 or 16 Channel
- Single or Six Gang Charger
- Pelican Storage Case

COMMON USES

The HT750TM radio is the affordable solution for professionals who require a rugged and reliable radio to stay in contact. This practical radio can easily help increase productivity by keeping users connected and free to concentrate on the job at hand.





DNV 8' X 10' ELECTRIC REEFER

► COMMON USES

The DNV 8' x 10' Electric Reefer is a cold storage container used to transport or store frozen and refrigerated food as well as other perishable items.




► TECHNICAL DATA

DIMENSIONS		L X W X H	
EXTERNAL (MM)		2991 x 2438 x 2591	
EXTERNAL (FT)		10' x 8' x 8'6"	
INTERNAL (MM)		2392 x 2294 x 2164	
INTERNAL (FT)		7'10" x 7'6" x 7'1"	
WEIGHT		KGS	LBS
TARE		3080	6790
PAYLOAD		6920	15256
MAX GROSS WEIGHT (MGW)		10000	22046
ADDITIONAL FEATURES			
<ul style="list-style-type: none"> Designed, Constructed, Tested to EN12079-1 / DNV 2.7-1 / SEPCo OPS 0055 / API RP 			




► DRAWINGS


FRONT VIEW
2438 mm [96"] [8']

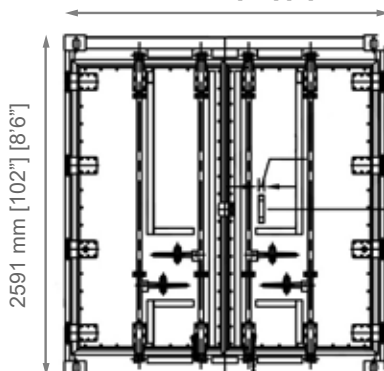

BACK VIEW



SIDE VIEW
2991mm [120"] [10']

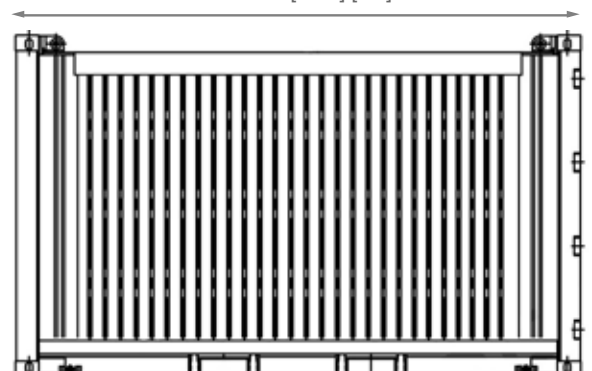



DNV 8' X 20' ELECTRIC REEFER

► COMMON USES

The DNV 8' x 20' Electric Reefer is a cold storage container used to transport or store frozen and refrigerated food as well as other perishable items.




► TECHNICAL DATA

DIMENSIONS	L X W X H	
EXTERNAL (MM)	6058 x 2438 x 2591	
EXTERNAL (FT)	20' x 8' x 8'6"	
INTERNAL (MM)	5450 x 2294 x 2164	
INTERNAL (FT)	17'11" x 7'6" x 7'1"	
WEIGHT	KGS	LBS
TARE	5270	11618
PAYLOAD	14730	32474
MAX GROSS WEIGHT (MGW)	20000	44092
ADDITIONAL FEATURES		
<ul style="list-style-type: none"> Designed, Constructed, Tested to EN12079-1 / DNV 2.7-1 / SEPCo OPS 0055 / API RP 		




► DRAWINGS

FRONT VIEW
2438 mm [96"] [8']

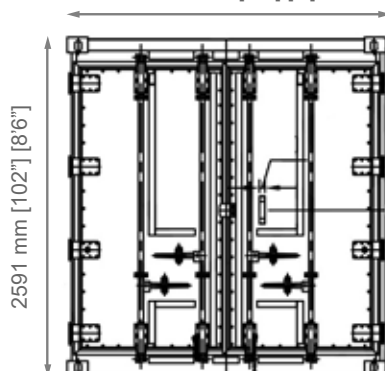

SIDE VIEW
6058 mm [240"] [20']

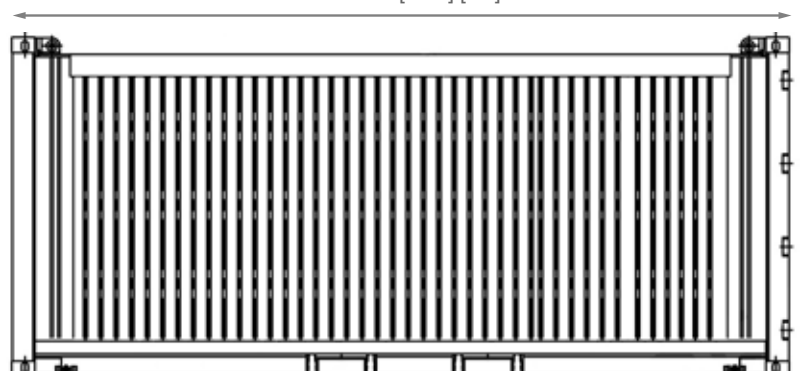



EXTENDED REACH FORKLIFT

► TECHNICAL DATA

Units: US Metric

Engine

- Model - Cat® C3.4B Tier 4 Interim
- Gross Power (Basic) - 111.3 hp

Weight

- Operating Weight - 26525.0 lbs

Operating Specifications

- Rated Load Capacity - 9000.0 lbs
- Maximum Lift Height - 43.0 ft
- Load at Max Height - No Stabilizers - 7000.0 lbs
- Maximum Forward Reach - 31.5 ft
- Load at Max Reach - No Stabilizers - 1200.0 lbs
- Top Travel Speed - 20.3 mph
- Load at Max Height - 7000.0 lbs
- Load at Max Reach - 1200.0 lbs
- Load at Maximum Height - 7000.0 lbs
- Load at Maximum Reach - 1200.0 lbs

Dimensions

- Height - 8.0 ft
- Width - 7.94 ft
- Wheelbase - 11.0 ft
- Length to Fork Face - 20.5 ft
- Ground Clearance - 19.0 in
- Turning Radius Over Tires - 12.0 ft

Service Refill Capacities

- Fuel Tank - 38.0 gal
- Hydraulic Tank - 41.5 gal





PORTABLE TENTS

► TECHNICAL DATA

Dimensions

- Height - 8 ft
- Width - 20 ft





PNEUMATIC JET FAN

► TECHNICAL DATA

- 20" diameter
- Fits API tank flange
- 10,400 CFM free air maximum @ 40-110 PSI input pressure and 60-290 CFM flow
- Cast aluminum housing and fan blade
- Weight: 100 lbs





500 BBL ROUND BOTTOM FRAC TANK

► TECHNICAL DATA

The 500 BBL Round Bottom Liquid Frac Tanks come equipped with new running gear and 10 mil DFT chemical resistant liners. All frac tanks are steel grit blasted and painted to your specs. Built from new 1/4" Heavy Duty Corrugated Steel.

- Floor - 1/4" PL, Round-Bottom Floor for Better Drainage
- Floor Support - 10" Channel Longitudinal Runners with 8" Channel and Formed 1/4" PL Channel Cross Members.
- Walls - 1/4" PL Solid Welded, Corrugated Steel, Corrugations 15" on Center.
- Roof - Flat top, 1/4" PL Solid Welded with Channel Supports Outside
- Front/Rear - 1/4" PL Solid Welded, Corrugated Steel, 10" Radius at Vertical Outside Corners.
- Drain/Fill - 4" Floor Drain at Rear End, 3" Fill Pipe to Roof at Rear, 4" Suction Line Connection at Front, 4" Mid High Connection at Front, 8" Flanged Front Manifold Connection with Turn Down to Floor Sump.
- Manway - 21" Manway on Front, Side, (3) Non-Sealed Hatches on Roof
- Pick Up - Standard 5th Wheel King Pin
- Welds - All Welds Continuous Except Substructure Crossmembers
- Axle - 25,000 lb. Axle with Air Brakes
- 11.00 x 22.5 Bias Tires on Steel Disc Wheels
- Access - Front Stairway
- Finish - Per Customer Specifications
- Hydrotesting - Full Capacity Static Test
- Dimensions - 45' Long, 8'-6" Wide, 10' High; 500 Barrel Capacity
- Tank Pressure/ Vacuum Relief Vent
- Level Gauging
- Options - Special Tank Linings, Special Sizes, Open Top Design, Fixed or Removable Steam Coils, 8" Exterior Manifold Assembly.



► TECHNICAL DATA*

- Raised height – 158" (4.01 m)
- Travel height – 103" (2.61 m)
- Width – 96" (2.43 m)
- Length with tongue – 168" (4.26 m)
- Length w/o tongue – 130" (3.3 m)
- Weight – 1920 lbs. (870.89 Kg)
- Energy Source – (6) 6-volt Deep Cycle batteries
- Generator – solar panel array
- Operating Temperature Range – -20 to +120 degrees F (-29 to +49 degrees C)
- Lift Mechanism – Leak resistant electro-hydraulic
- Main Frame – 2" x 4" x .120" high grade steel
- Sign Case: 70" High x 127" Wide
- On-board dedicated NTCIP-compliant controller
- 5 LEDs per pixel provide uniform light output
- Energy-efficient LED display provides minimal battery maintenance and long operational life
- Automatic intensity control provides optimum LED intensity
- Industrial-grade trailer provides stable platform
- Powder-coat paint for improved fade and scratch resistance



* Specifications may change depending on model available at time of rental.

► TECHNICAL DATA

- High visibility PVC injection molded cones
- Color is molded throughout, fluorescent orange and green
 - resists fading
 - provides high visibility protection
- One piece design - cone is permanently molded to black base
 - won't separate when hit by a vehicle
 - rubber base designed to grip the road
- 36" and 28" cones have handgrip at top
- Recessed collars on 28" & 36" cones help keep sheeting free from scratches
- Durable and reboundable
- Stable on the road, won't be blown over
- Cone weights available if additional ballast is needed
- Stackable for storage, no sticking when removed
- Available in:
 - 36" (10 or 12 lbs.) fluorescent orange
 - 28" (7 or 10 lbs.) fluorescent orange
 - 28" (7 lbs.) lime green
 - 18" (3 lbs.) fluorescent orange and lime green
- Cone is available with or without high intensity prismatic white collars
 - 3M® collars have excellent wide angle retroreflectivity
- Stenciling available
- MASH Accepted, Meets MUTCD Standards





HAND WASING STATIONS

► TECHNICAL DATA

- **H x W x D** 62 x 26.5 in x 21.5 in
- **Weight Empty** 70 lb / 32 kg
- **Weight Full** 254 lb / 115.2 kg
- **Fresh Water Capacity** 22 gal / 83 L
- **Gray Water Capacity** 24 gal / 91 L
- **Pump Capacity (per stroke)** 2 fl oz / 59.14 ml
- **Number of Dispenses** 1408
- **Soap Dispenser Capacity** 2 x 30 fl oz / 2 x 887 ml
- **Total Soap Dispenser Capacity** 60 fl oz / 1,774 ml
- Paper Towel Capacity 250 towels per pack.
- 1000 towels per wash station.
- (Four packs of single-fold towels
- Georgia Pacific 23504)

Features include:

- **Capacity:** 22-gallon fresh water, 24-gallon grey water
- Nearly 350 uses without refilling
- Includes two soap dispensers, four paper towel dispensers and hands-free foot pump operation
- Includes drain plugs and lockable fill caps
- Engineered with built-in handles to easily maneuver into place
- Easy on-site maintenance with handy siphon port for pump out
- Stays put with tie-down ring
- Weighs 70-lbs empty, 250-lbs full
- Note: Non-heated sinks can not be upgraded to heated versions.



* Specifications may change depending on model available at time of rental.



PORTABLE TOILET RENTALS

► TECHNICAL DATA

The original portable toilet. Our Standard Portable Toilet can be used in many different environments and applications.

Select units are reserved for special events use only.

- Dimensions - 4' x 4' x 8'
- View Our Other Portable Toilets:
- Deluxe Portable Toilets
- Women's Portable Toilets
- Caged Lift-Eye Can
- Lift-Eye Can Without Cage
- Elevator Toilet Half-Can
- Can-On-Wheels
- European Urinal
- Paper Supplies



* Portable toilet sizes are approximate and could vary. Specs may change depending on model available at time of rental.



EXTENDED REACH FORKLIFT

► TECHNICAL DATA

Units: US Metric

Engine

- Model - Cat® C3.4B Tier 4 Interim
- Gross Power (Basic) - 111.3 hp

Weight

- Operating Weight - 26525.0 lbs

Operating Specifications

- Rated Load Capacity - 9000.0 lbs
- Maximum Lift Height - 43.0 ft
- Load at Max Height - No Stabilizers - 7000.0 lbs
- Maximum Forward Reach - 31.5 ft
- Load at Max Reach - No Stabilizers - 1200.0 lbs
- Top Travel Speed - 20.3 mph
- Load at Max Height - 7000.0 lbs
- Load at Max Reach - 1200.0 lbs
- Load at Maximum Height - 7000.0 lbs
- Load at Maximum Reach - 1200.0 lbs

Dimensions

- Height - 8.0 ft
- Width - 7.94 ft
- Wheelbase - 11.0 ft
- Length to Fork Face - 20.5 ft
- Ground Clearance - 19.0 in
- Turning Radius Over Tires - 12.0 ft

Service Refill Capacities

- Fuel Tank - 38.0 gal
- Hydraulic Tank - 41.5 gal



Worldwide Presence



Tiger Rentals has a growing geographic presence that spans across the globe. We have fully stocked locations in key ports in North America, South America, Africa, the Mediterranean, Middle East and Southeast Asia allowing us to dispatch the equipment you need immediately, 24/7/365.



Make it happen.

Page 14 | 4-Apr-20
24/7 Dispatch – 1.877.844.3791 | tigeroffshorerentals.com

© Copyright 2016 Modern Group Inc. All rights reserved.